



STANDARD FEATURES

- DURABLE STAINLESS STEEL**
 Our megatops boast a sturdy stainless steel exterior and interior finish and galvanized back panel providing strength and durability.
- ERGONOMICALLY DESIGNED SOLID DOORS**
 Standard doors come with easy grip handles and self closing/120 ° stay open door feature, working together for customer convenience.
- MAGNETIC DOOR GASKET**
 Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.
- EFFICIENT REFRIGERATION SYSTEM**
 Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33°F to 41°F. Forced air design underneath pans to keep products fresh.
- FRONT BREATHING**
 Allows unrestricted placement of the unit.
- HIGH DENSITY POLYURETHANE INSULATION**
 2" Ecomate® CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- INSULATED LIDS**
 Removable insulated lids keep food fresh and cold by reducing condensation.
- REVERSIBLE & EASY CLEANING CUTTING BOARD**
 The full length removable white polyethylene cutting board provides a comfortable 10" operation space.
- STANDARD WITH FULL SETS OF 1/6th PANS, 4" DEEP**
 It also accomodate 6" deep pans (except for APTM-27: has three 1/9th size pans).

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters /
 6" Adjustable stainless steel legs / 220V-50 cycles- 1 phase

Mega Top Tables

- APTM-27-12
- APTM-48-18
- APTM-60-24
- APTM-70-32



APTM-27-12



APTM-48




APTM-72-30




MODEL	DOORS	TOP PANS	SHLVs.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS			SHIPPING	
REFRIGERATOR													
									L	D*	H**	Wt.	Cubes
APTM-27-12	1	12	1	5.1	1/6	115/60/1	5-15P	8'	27"	34"	41-5/8"	225	36
APTM-48-18	2	18	2	6.0	1/4	115/60/1	5-15P	8'	48"	34"	41-5/8"	327	55
APTM-60-24	2	24	2	7.3	1/3	115/60/1	5-15P	8'	60"	34"	41-5/8"	380	73
APTM-72-30	3	30	3	8.0	1/3	115/60/1	5-15P	8'	72"	34"	41-5/8"	465	87

* Depth does not include 1" rear bumper **Height does not include 5" overall for casters

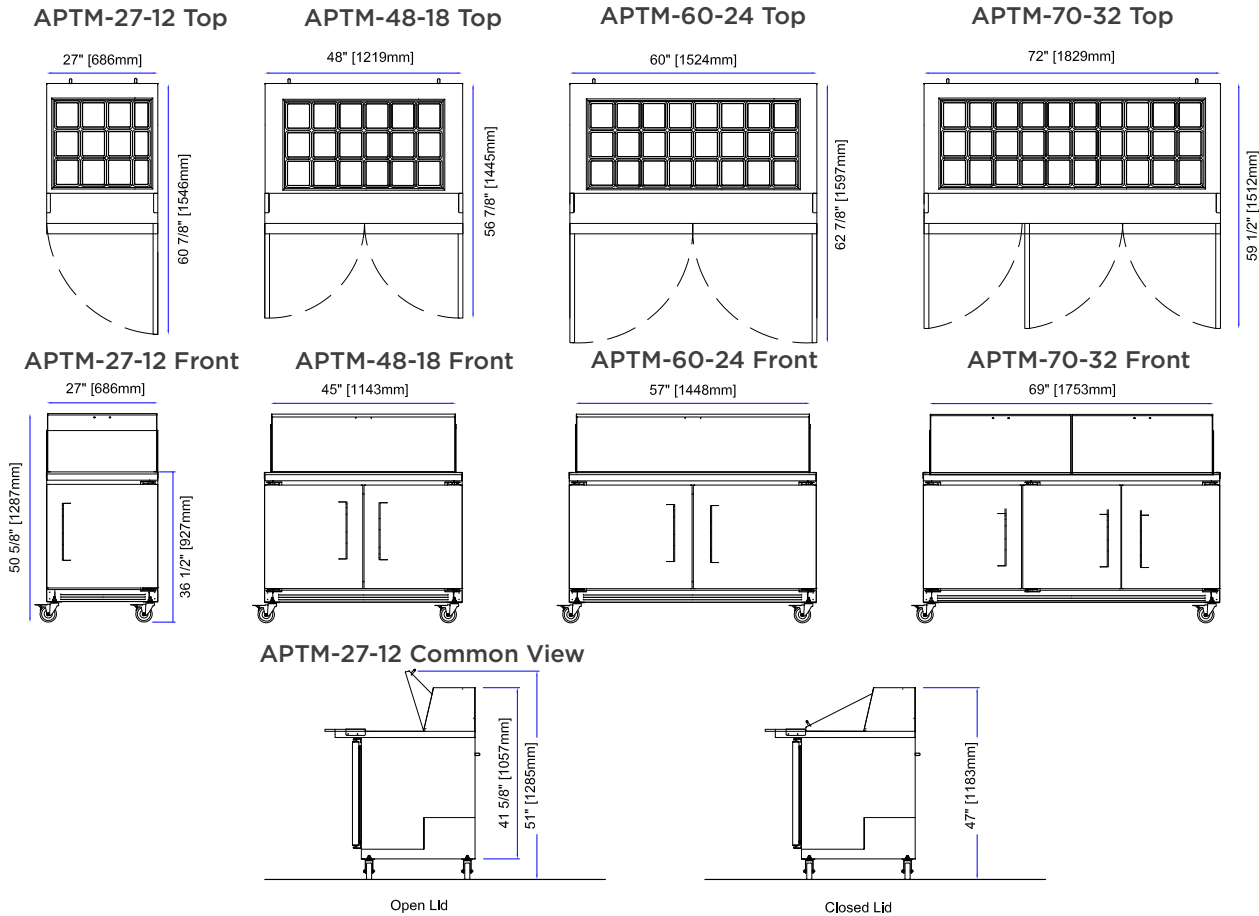

* Specifications



CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : Entire foamed-in-place high-density, Ecomate® CFC-free, polyurethane insulation. Covered corner floor to meet NSF requirements.
- CASTERS: 4" Diameter swivel casters, front two with brakes.
- SHELVES: 2 Adjustable heavy duty epoxy coated wire shelves per door.

DOORS

- Stainless steel exterior with ABS interior liner.
- One piece constructions magnetic gasket, removable without tools for easy cleaning.
- Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134A holding temperature at 33°F to 41°F Refrigerators.
- Self-contained capillary tube system using environmentally-friendly and CFC-free refrigerant.
- Front breathing allows unrestricted placement of the unit.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V / 50Hz / 1Ph available from factory.

WARRANTY

Continental USA & Canada:

- One year** labor and parts warranty.
- Five year** compressor warranty.
- International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.