

STANDARD FEATURES

HEAVY DUTY CONSTRUCTION

Top is made of solid 18" gauge stainless steel, including drip tray(s) for easy cleaning.

Wear-resistant black vinyl exterior, galvanized interior with durable stainless steel floor, and coved corners.

Drain is located in rear of cabinets to keep unit pristine at all times. Ecomate® insulation foamed in place.

POLISHED STAINLESS STEEL TOWERS

Draft towers are three inches in diameter, stainless steel with polyurethane insulation. The continuous flow of cold air thoughout tower results in a perfect pour Ecomate® insulation foamed in place

₭ CO2 GAS VALVE INCLUDED

STAY OPEN DOORS WITH LOCKS AND LIGHT

90° Stay open door feature and interior LED light underneath the mullion.

MAGNETIC GASKETS

Built of one piece, the gasket is removable without tools for ease of cleaning and replacement.

ENHANCED REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. CFC free R-134a refrigerators maintain temperature between 33°F to 38°F, keeping beers ice cold.

SIDE MOUNT COMPRESSOR & FRONT BREATHING

System allows easy service and unrestricted placement of the unit.

% ANALOG THERMOSTAT

೫ INTERCHANGE DOORS ▮

Field interchangeable doors from Solid to Glass or Glass to Solid based on operator's needs.

第 GREATER USABLE INTERIOR CAPACITY

Evaporator located on left side above compressor providing a greater working interior capacity.

% ADDC-23

Single keg units are rear breathing with internal drain, internal CO2 chain harness and with knockout place for external CO2 placement. Standard with 3"casters.

OPTIONS 🚷 ACCESSORIES

Single / Double draft towers / 3" Rails Casters / 6" Adjustable stainless steel legs / Dunnage floor / 220v-50Hz-1Phase Stainless Steel Bar Equipment




MODEL	DOORS	TOWERS	TAPS	BARRELS	AMPS	HP	VOLTAGE	NEMA PLUG	Cabine L	et Dimensi D*	ons H		oping Cubes	
SOLID DOOR														
ADDC-23	1	1	1	1	2.5	1/6	115/60/1	5-15P	24 ^{1/4} "	30 1/2"	40 ^{1/8} "	165	23	
ADDC-58	2	2	3	3	6.6	1/3	115/60/1	5-15P	59 ^{1/2} "	28"	37"	314	51	
ADDC-68	2	2	3	3	6.6	1/3	115/60/1	5-15P	69 ^{1/2} "	28"	37"	370	59	
ADDC-78	3	2	4	4	6.9	1/3	115/20/1	5-15P	80"	28 1/2"	36 ^{3/4} "	396	68	
ADDC-94	3	2	4	5	7.2	1/3	115/60/1	5-15P	95 ^{1/2} "	28"	37"	409	81	

* Depth does not include 1" bumper





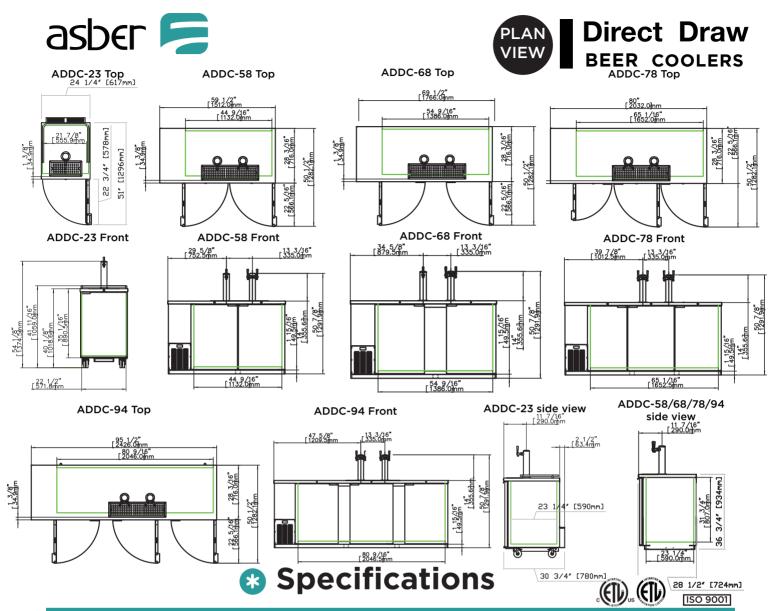

④ CONSTRUCTION

- 18 gauge stainless steel top and stylish black vinyl finish front, sides and back. Interior built of galvanized steel walls with coved corner stainless steel floor. Interior LED light.
- The entire cabinet has a 1-1/2" Ecomate® CFC-free, polyurethane insulation foamed-in-place.

④ REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Self-contained capillary tube system using environtmentallyfriendly and CFC-free refrigerant. R-134a holding temperature at 33°F to 38°F refrigerators.
- Front breathing/side mount compressor for ease of service and placement in narrow spaces. Condensing unit is behind the front grill, slides out for esay cleaning and maintenance.

④ ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

- Field interchageable doors with 90° stay open feature and locks standard. One piece magnetic gaskets for easy cleaning.
- ADDC-23 single keg units are rear breathing with internal drain, internal CO2 chain harness and with knockout place for external CO2 placement. Standard with 3"casters.
- Drain is loacted in the back, inside compressor housing.
- Forced air cooling system for faster cooling and constant temperature in the cabinet.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.
- Analog thermostat.

WARRANTY

Continental USA & Canada:

- One year labor and parts warranty.
- Five year compressor warranty.
- International: one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.



