




## TO LOAD LABELS

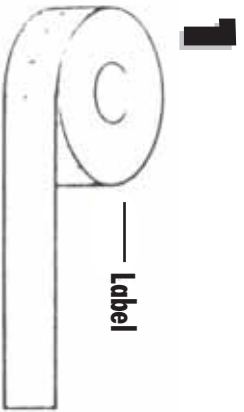


Peel off the first 8 or so from the label roll.

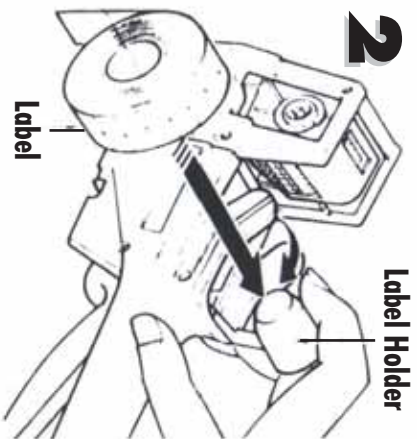

To load labels into the machine, pull-out label holder and load labels.

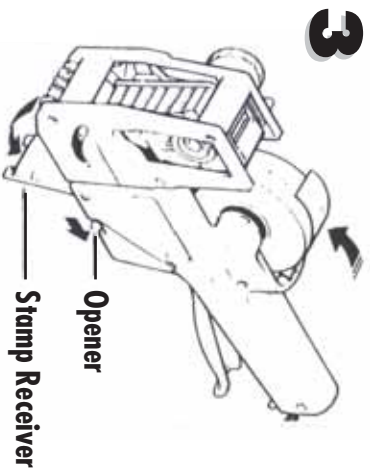


Push back the label loaded holder until its properly set, and open stamp receiver with openers.

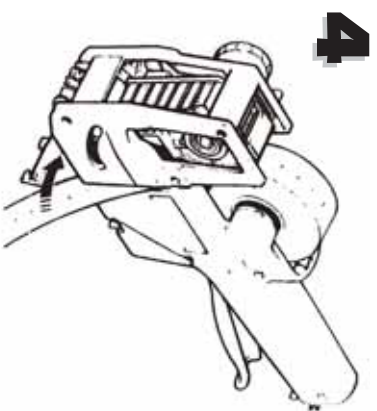


Insert labels into the channel on left side of labeler and close stamp receiver.

**5**  
Engage the label holes onto ratchet of drum and operate machine while pressing label with finger until the first label appears.

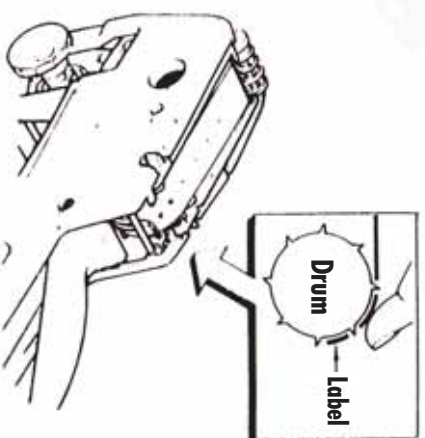

## TO SET PRINT DIGITS


Move dial shaft until indicator is at required station. Turn dial shaft until appropriate printing character appears in the viewing frame.

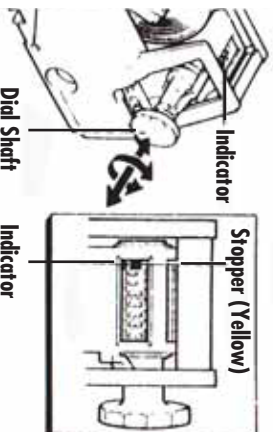

For Blank Space set a stopper at viewing frame.

## TO ADJUST IMPRINT POSITION

Loosen stamp setting screw and move to the arrow directions to adjust imprint position.

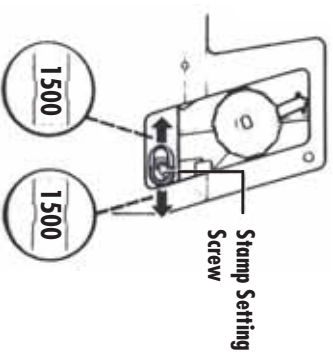

## CORRECT USE


**1**



**SQUEEZE!**

Fully squeeze the operating lever. Insufficient pressure will cause an unclear imprint.


**2**

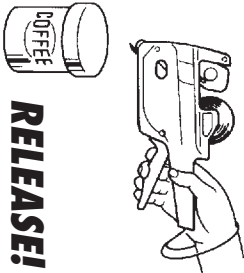

**RELEASE!**

Fully release operating lever to obtain printed label at the dispensing head.

**3**

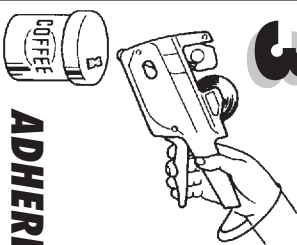

**ADHERE!**


Lightly touch the product to be labeled. The label should firmly adhere to the product by the roll-on action of the front roller.

## TO REPLACE INK ROLLER

### CAUTION:


Never refill with ink since the ink roller is disposable. When the printing fades, be sure to replace with a new ink roller.

### TO REMOVE INK ROLLER

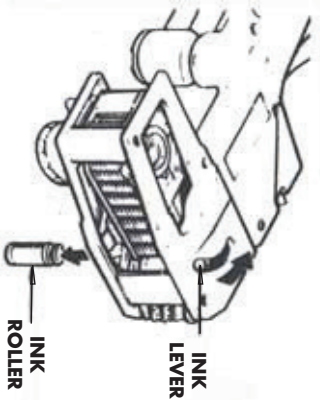

Move the ink lever to the arrow direction and the ink roller will slip off.

### TO LOAD INK ROLLER

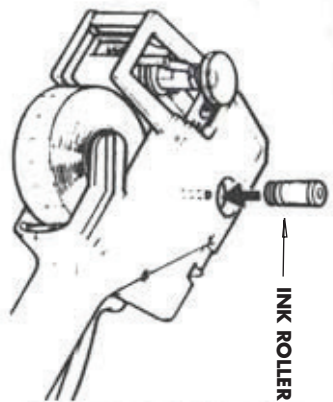

Set in the new ink roller while holding ink roller set lever.



Safety Systems

[www.daymark.com](http://www.daymark.com)

# Operating Instructions



## 1 Line Marker (DayMark 3)


### DayMark Lifetime Guarantee

DayMark will repair and recondition your date coding markers as long as labels and ink rollers are being purchased from DayMark. DayMark's replacement policy requires our customers to send in the marker needing reconditioning first, before a replacement marker is issued.

### For Replacement

- 1) Call your customer service representative at 800-847-0101 to request a Return Authorization Number (RA#).
- 2) Label your box for your DayMark marker return.
- 3) Upon receipt of the return marker, DayMark will ship a replacement marker to you within 24-48 hours. DayMark markers with "special band layouts" will require a longer lead time.

### PART NAME

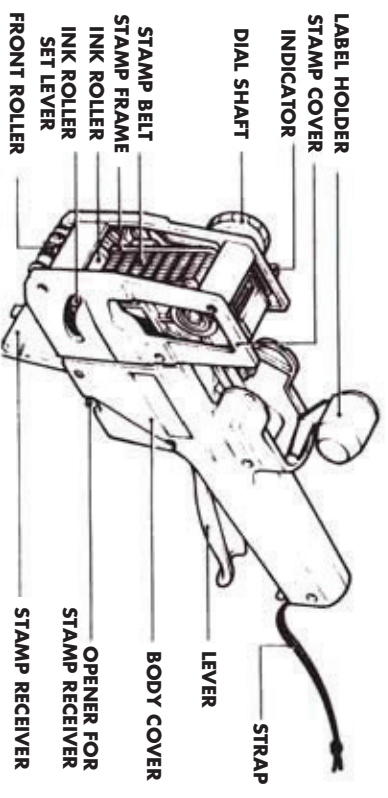

Safety Systems