



There's only one #1™

Project _____

Item # _____

Quantity _____


Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

The Hatco Glo-Ray® Heated Shelf has an extruded aluminum base with non-slip rubber feet, stainless steel top and blanket-type element for uniform heat distribution. Fiberglass insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature. Ideal for pass-through areas, buffet lines or as a heated work shelf.

Standard features

- Uniform heat distribution with blanket-type element
- Built-in adjustable thermostat controls surface temperature
- Available in widths from 18" to 72" (457-1829 mm) and depths from 6" to 25.5" (152-648 mm)
- Extruded aluminum base with stainless steel top (optional hardcoated aluminum surface)
- Standard Legs:
 - Units 36" (914 mm) wide and under: 1" (25 mm) legs
 - Units 42" (1067 mm) or wider: 4" (102 mm) legs
- All models include a 72" (1829 mm) cord and plug attached.

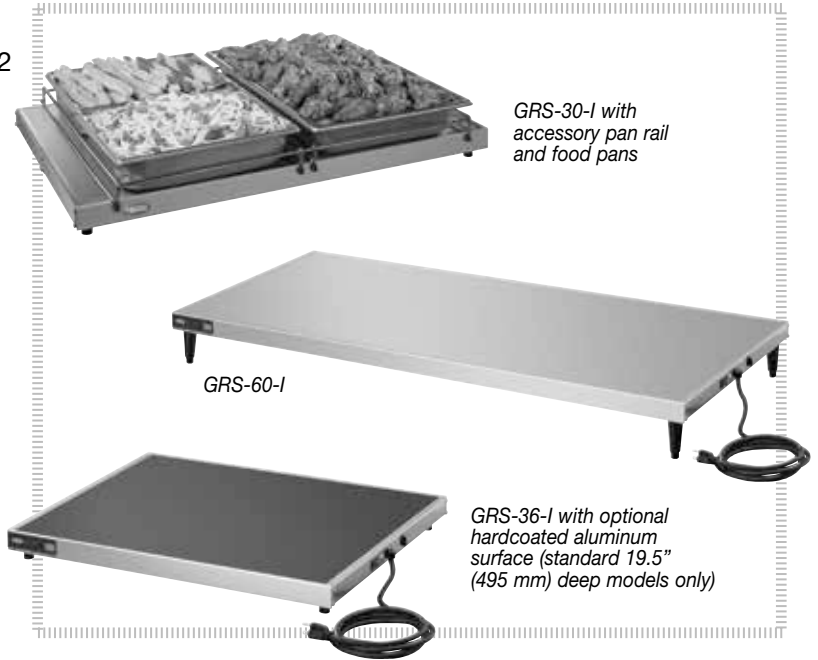

Options (available at time of purchase only)

Designer Color† (top surface not painted) – Clear Anodized standard

- | | | | |
|------------------------------------|---------------------------------------|-----------------------------------------|----------------------------------------|
| <input type="checkbox"/> Warm Red | <input type="checkbox"/> Black | <input type="checkbox"/> Gray Granite | <input type="checkbox"/> White Granite |
| <input type="checkbox"/> Navy Blue | <input type="checkbox"/> Hunter Green | <input type="checkbox"/> Antique Copper | |

Hardcoated Surface in lieu of Stainless Steel on Standard 19.5" (495 mm)

deep "I" units - please consult factory for other depths

- | | |
|------------------------------------------------|------------------------------------------------|
| <input type="checkbox"/> GRS-18 through GRS-42 | <input type="checkbox"/> GRS-48 through GRS-72 |
|------------------------------------------------|------------------------------------------------|

Accessories

4" (102 mm) adjustable Legs (standard on GRS-42 units and larger)

Pan Rail for 19.5" (495 mm) models only

- | | | | |
|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| <input type="checkbox"/> 2-Pan | <input type="checkbox"/> 3-Pan | <input type="checkbox"/> 4-Pan | <input type="checkbox"/> 5-Pan |
|--------------------------------|--------------------------------|--------------------------------|--------------------------------|

†Non-standard colors are non-returnable




HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

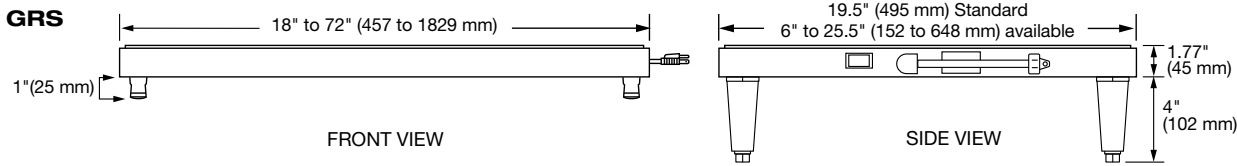

Units 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) need to be either sealed, or raised from the installation surface with 4" (102 mm) legs (included)

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

| 19.5" (495 mm) DEPTH (I) | | | | | | |
|--------------------------|-----------------------------|-----------------------|---------|---------|----------------|----------------|
| Model | Dimensions* (W x H) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight† |
| GRS-18-I | 18" x 2.25" (457 x 57 mm) | 100 | 250 | 2.5 | NEMA 5-15P | 16 lbs (8 kg) |
| | | 120 | 250 | 2.1 | NEMA 5-15P | |
| | | 220 | 228 | 1.0 | CEE 7/7 Schuko | |
| | | 240 | 272 | 1.1 | BS-1363 | |
| | | 220-230 (CE) | 228-250 | 1.0-1.1 | CEE 7/7 Schuko | |
| GRS-24-I | 24" x 2.25" (610 x 57 mm) | 100 | 350 | 3.5 | NEMA 5-15P | 20 lbs (10 kg) |
| | | 120 | 350 | 2.9 | NEMA 5-15P | |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 380 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5-1.6 | CEE 7/7 Schuko | |
| GRS-30-I | 30" x 2.25" (762 x 57 mm) | 100 | 450 | 4.5 | NEMA 5-15P | 25 lbs (12 kg) |
| | | 120 | 450 | 3.8 | NEMA 5-15P | |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| GRS-36-I | 36" x 2.25" (914 x 57 mm) | 100 | 550 | 5.5 | NEMA 5-15P | 28 lbs (13 kg) |
| | | 120 | 550 | 4.6 | NEMA 5-15P | |
| | | 220 | 504 | 2.3 | CEE 7/7 Schuko | |
| | | 240 | 598 | 2.5 | BS-1363 | |
| | | 220-230 (CE) | 504-550 | 2.3-2.4 | CEE 7/7 Schuko | |
| GRS-42-I* | 42" x 5.25" (1067 x 133 mm) | 100 | 600 | 6.0 | NEMA 5-15P | 32 lbs (15 kg) |
| | | 120 | 600 | 5.0 | NEMA 5-15P | |
| | | 220 | 548 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 652 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 548-600 | 2.5-2.6 | CEE 7/7 Schuko | |

| 19.5" (495 mm) DEPTH (I) | | | | | | |
|--------------------------|-----------------------------|-----------------------|-----------|---------|----------------|-----------------|
| Model | Dimensions (W x H) | Voltages Single phase | Watts | Amps | Plug | Ship Weight† |
| GRS-48-I* | 48" x 5.25" (1219 x 133 mm) | 100 | 700 | 7.0 | NEMA 5-15P | 36 lbs (17 kg) |
| | | 120 | 700 | 5.8 | NEMA 5-15P | |
| | | 220 | 640 | 3.0 | CEE 7/7 Schuko | |
| | | 240 | 760 | 3.2 | BS-1363 | |
| | | 220-230 (CE) | 640-700 | 2.9-3.0 | CEE 7/7 Schuko | |
| GRS-54-I* | 54" x 5.25" (1372 x 133 mm) | 100 | 800 | 8.0 | NEMA 5-15P | 42 lbs. (20 kg) |
| | | 120 | 800 | 6.7 | NEMA 5-15P | |
| | | 220 | 732 | 3.3 | CEE 7/7 Schuko | |
| | | 240 | 870 | 3.6 | BS-1363 | |
| | | 220-230 (CE) | 732-800 | 3.3-3.5 | CEE 7/7 Schuko | |
| GRS-60-I* | 60" x 5.25" (1524 x 133 mm) | 100 | 900 | 9.0 | NEMA 5-15P | 44 lbs. (20 kg) |
| | | 120 | 900 | 7.5 | NEMA 5-15P | |
| | | 220 | 824 | 3.7 | CEE 7/7 Schuko | |
| | | 240 | 980 | 4.1 | BS-1363 | |
| | | 220-230 (CE) | 824-900 | 3.7-3.9 | CEE 7/7 Schuko | |
| GRS-66-I* | 66" x 5.25" (1676 x 133 mm) | 100 | 1000 | 10.0 | NEMA 5-15P | 50 lbs (23 kg) |
| | | 120 | 1000 | 8.3 | NEMA 5-15P | |
| | | 220 | 916 | 4.2 | CEE 7/7 Schuko | |
| | | 240 | 1088 | 4.5 | BS-1363 | |
| | | 220-230 (CE) | 915-1000 | 4.2-4.3 | CEE 7/7 Schuko | |
| GRS-72-I* | 72" x 5.25" (1829 x 133 mm) | 100 | 1100 | 11.0 | NEMA 5-15P | 56 lbs (26 kg) |
| | | 120 | 1100 | 9.2 | NEMA 5-15P | |
| | | 220 | 1008 | 4.6 | CEE 7/7 Schuko | |
| | | 240 | 1196 | 5.0 | BS-1363 | |
| | | 220-230 (CE) | 1006-1100 | 4.6-4.8 | CEE 7/7 Schuko | |

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.
 † NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.
 † Shipping weight includes packaging.

Pan Capacity

Accommodates 12" x 20" (305 x 508 mm) steam table pans

| Model | Capacity | Model | Capacity |
|----------|----------|----------|----------|
| GRS-18-I | 1 pan | GRS-48-I | 3 pans |
| GRS-24-I | 1 pan | GRS-54-I | 4 pans |
| GRS-30-I | 2 pans | GRS-60-I | 4 pans |
| GRS-36-I | 2 pans | GRS-66-I | 5 pans |
| GRS-42-I | 3 pans | GRS-72-I | 5 pans |

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

| 6" (152 mm) DEPTH (A) | | | | | | |
|-----------------------|-----------------------------|-----------------------|---------|---------|----------------|----------------|
| Model | Dimensions (W x H) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight† |
| GRS-18-A | 18" x 2.25" (457 x 57 mm) | 120 | 100 | 0.8 | NEMA 5-15P | 10 lbs (5 kg) |
| | | 220 | 91 | 0.4 | CEE 7/7 Schuko | |
| | | 240 | 109 | 0.5 | BS-1363 | |
| | | 220-230 (CE) | 91-100 | 0.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 100-109 | 0.4-0.5 | BS-1363 | |
| GRS-24-A | 24" x 2.25" (610 x 57 mm) | 120 | 125 | 1.0 | NEMA 5-15P | 11 lbs (5 kg) |
| | | 220 | 114 | 0.5 | CEE 7/7 Schuko | |
| | | 240 | 136 | 0.6 | BS-1363 | |
| | | 220-230 (CE) | 114-125 | 0.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 125-136 | 0.5-0.6 | BS-1363 | |
| GRS-30-A | 30" x 2.25" (762 x 57 mm) | 120 | 150 | 1.3 | NEMA 5-15P | 9 lbs (5 kg) |
| | | 220 | 137 | 0.6 | CEE 7/7 Schuko | |
| | | 240 | 163 | 0.7 | BS-1363 | |
| | | 220-230 (CE) | 137-150 | 0.6-0.7 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 150-163 | 0.7 | BS-1363 | |
| GRS-36-A | 36" x 2.25" (914 x 57 mm) | 120 | 175 | 1.5 | NEMA 5-15P | 11 lbs (5 kg) |
| | | 220 | 160 | 0.7 | CEE 7/7 Schuko | |
| | | 240 | 190 | 0.8 | BS-1363 | |
| | | 220-230 (CE) | 160-175 | 0.6-0.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 175-190 | 0.8 | BS-1363 | |
| GRS-42-A* | 42" x 5.25" (1067 x 133 mm) | 120 | 225 | 1.9 | NEMA 5-15P | 15 lbs (7 kg) |
| | | 220 | 205 | 0.9 | CEE 7/7 Schuko | |
| | | 240 | 245 | 1.0 | BS-1363 | |
| | | 220-230 (CE) | 205-225 | 0.9-1.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 225-245 | 1.0 | BS-1363 | |
| GRS-48-A* | 48" x 5.25" (1219 x 133 mm) | 120 | 250 | 2.1 | NEMA 5-15P | 16 lbs (8 kg) |
| | | 220 | 228 | 1.0 | CEE 7/7 Schuko | |
| | | 240 | 272 | 1.1 | BS-1363 | |
| | | 220-230 (CE) | 228-250 | 1.0-1.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 250-272 | 1.1 | BS-1363 | |
| GRS-54-A* | 54" x 5.25" (1372 x 133 mm) | 120 | 275 | 2.3 | NEMA 5-15P | 17 lbs (8 kg) |
| | | 220 | 251 | 1.1 | CEE 7/7 Schuko | |
| | | 240 | 299 | 1.2 | BS-1363 | |
| | | 220-230 (CE) | 251-275 | 1.1-1.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 275-299 | 1.2 | BS-1363 | |
| GRS-60-A* | 60" x 5.25" (1524 x 133 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 18 lbs (9 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 326 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-326 | 1.3-1.4 | BS-1363 | |
| GRS-66-A* | 66" x 5.25" (1676 x 133 mm) | 120 | 325 | 2.7 | NEMA 5-15P | 20 lbs (9 kg) |
| | | 220 | 297 | 1.4 | CEE 7/7 Schuko | |
| | | 240 | 353 | 1.5 | BS-1363 | |
| | | 220-230 (CE) | 297-325 | 1.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 325-353 | 1.4-1.5 | BS-1363 | |
| GRS-72-A* | 72" x 5.25" (1829 x 133 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 22 lbs (10 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 380 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-380 | 1.5-1.6 | BS-1363 | |

| 7.75" (152 mm) DEPTH (B) | | | | | | |
|--------------------------|-----------------------------|-----------------------|---------|---------|----------------|----------------|
| Model | Dimensions (W x H) | Voltages Single phase | Watts | Amps | Plug | Ship Weight† |
| GRS-18-B | 18" x 2.25" (457 x 57 mm) | 120 | 100 | 0.8 | NEMA 5-15P | 10 lbs (5 kg) |
| | | 220 | 91 | 0.4 | CEE 7/7 Schuko | |
| | | 240 | 109 | 0.5 | BS-1363 | |
| | | 220-230 (CE) | 91-100 | 0.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 100-109 | 0.4-0.5 | BS-1363 | |
| GRS-24-B | 24" x 2.25" (610 x 57 mm) | 120 | 125 | 1.0 | NEMA 5-15P | 11 lbs (5 kg) |
| | | 220 | 114 | 0.5 | CEE 7/7 Schuko | |
| | | 240 | 136 | 0.6 | BS-1363 | |
| | | 220-230 (CE) | 114-125 | 0.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 125-136 | 0.5-0.6 | BS-1363 | |
| GRS-30-B | 30" x 2.25" (762 x 57 mm) | 120 | 150 | 1.3 | NEMA 5-15P | 12 lbs (6 kg) |
| | | 220 | 137 | 0.6 | CEE 7/7 Schuko | |
| | | 240 | 163 | 0.7 | BS-1363 | |
| | | 220-230 (CE) | 137-150 | 0.6-0.7 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 150-163 | 0.7 | BS-1363 | |
| GRS-36-B | 36" x 2.25" (914 x 57 mm) | 120 | 175 | 1.5 | NEMA 5-15P | 14 lbs (7 kg) |
| | | 220 | 160 | 0.7 | CEE 7/7 Schuko | |
| | | 240 | 190 | 0.8 | BS-1363 | |
| | | 220-230 (CE) | 160-175 | 0.6-0.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 175-190 | 0.8 | BS-1363 | |
| GRS-42-B* | 42" x 5.25" (1067 x 133 mm) | 120 | 225 | 1.9 | NEMA 5-15P | 17 lbs (8 kg) |
| | | 220 | 205 | 0.9 | CEE 7/7 Schuko | |
| | | 240 | 245 | 1.0 | BS-1363 | |
| | | 220-230 (CE) | 205-225 | 0.9-1.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 225-245 | 1.0 | BS-1363 | |
| GRS-48-B* | 48" x 5.25" (1219 x 133 mm) | 120 | 250 | 2.1 | NEMA 5-15P | 19 lbs (9 kg) |
| | | 220 | 228 | 1.0 | CEE 7/7 Schuko | |
| | | 240 | 272 | 1.1 | BS-1363 | |
| | | 220-230 (CE) | 228-250 | 1.0-1.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 250-272 | 1.1 | BS-1363 | |
| GRS-54-B* | 54" x 5.25" (1372 x 133 mm) | 120 | 275 | 2.3 | NEMA 5-15P | 20 lbs (10 kg) |
| | | 220 | 251 | 1.1 | CEE 7/7 Schuko | |
| | | 240 | 299 | 1.2 | BS-1363 | |
| | | 220-230 (CE) | 251-275 | 1.1-1.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 275-299 | 1.2 | BS-1363 | |
| GRS-60-B* | 60" x 5.25" (1524 x 133 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 21 lbs (10 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 326 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-326 | 1.3-1.4 | BS-1363 | |
| GRS-66-B* | 66" x 5.25" (1676 x 133 mm) | 120 | 325 | 2.7 | NEMA 5-15P | 23 lbs (11 kg) |
| | | 220 | 297 | 1.4 | CEE 7/7 Schuko | |
| | | 240 | 353 | 1.5 | BS-1363 | |
| | | 220-230 (CE) | 297-325 | 1.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 325-353 | 1.4-1.5 | BS-1363 | |
| GRS-72-B* | 72" x 5.25" (1829 x 133 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 25 lbs (12 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 380 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-380 | 1.5-1.6 | BS-1363 | |

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS

Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

| 9.75" (248 mm) DEPTH (C) | | | | | | |
|--------------------------|-----------------------------|-----------------------|---------|---------|----------------|----------------|
| Model | Dimensions (W x H) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight† |
| GRS-18-C | 18" x 2.25" (457 x 57 mm) | 120 | 125 | 1.0 | NEMA 5-15P | 12 lbs (6 kg) |
| | | 220 | 114 | 0.5 | CEE 7/7 Schuko | |
| | | 240 | 136 | 0.6 | BS-1363 | |
| | | 220-230 (CE) | 114-125 | 0.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 125-136 | 0.5-0.6 | BS-1363 | |
| GRS-24-C | 24" x 2.25" (610 x 57 mm) | 120 | 175 | 1.5 | NEMA 5-15P | 13 lbs (6 kg) |
| | | 220 | 160 | 0.7 | CEE 7/7 Schuko | |
| | | 240 | 190 | 0.8 | BS-1363 | |
| | | 220-230 (CE) | 160-175 | 0.7-0.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 175-190 | 0.8 | BS-1363 | |
| GRS-30-C | 30" x 2.25" (762 x 57 mm) | 120 | 225 | 1.9 | NEMA 5-15P | 14 lbs (7 kg) |
| | | 220 | 206 | 0.9 | CEE 7/7 Schuko | |
| | | 240 | 245 | 1.0 | BS-1363 | |
| | | 220-230 (CE) | 206-225 | 0.9-1.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 225-245 | 1.0 | BS-1363 | |
| GRS-36-C | 36" x 2.25" (914 x 57 mm) | 120 | 275 | 2.3 | NEMA 5-15P | 16 lbs (8 kg) |
| | | 220 | 252 | 1.1 | CEE 7/7 Schuko | |
| | | 240 | 299 | 1.2 | BS-1363 | |
| | | 220-230 (CE) | 252-275 | 1.1-1.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 275-299 | 1.2 | BS-1363 | |
| GRS-42-C* | 42" x 5.25" (1067 x 133 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 18 lbs (9 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 326 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-326 | 1.3-1.4 | BS-1363 | |
| GRS-48-C* | 48" x 5.25" (1219 x 133 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 20 lbs (9 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 380 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-380 | 1.5-1.6 | BS-1363 | |
| GRS-54-C* | 54" x 5.25" (1372 x 133 mm) | 120 | 400 | 3.3 | NEMA 5-15P | 22 lbs (10 kg) |
| | | 220 | 366 | 1.7 | CEE 7/7 Schuko | |
| | | 240 | 435 | 1.8 | BS-1363 | |
| | | 220-230 (CE) | 366-400 | 1.7-1.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 400-435 | 1.7-1.8 | BS-1363 | |
| GRS-60-C* | 60" x 5.25" (1524 x 133 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 25 lbs (12 kg) |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 450-490 | 2.0 | BS-1363 | |
| GRS-66-C* | 66" x 5.25" (1676 x 133 mm) | 120 | 500 | 4.2 | NEMA 5-15P | 26 lbs (12 kg) |
| | | 220 | 458 | 2.1 | CEE 7/7 Schuko | |
| | | 240 | 544 | 2.3 | BS-1363 | |
| | | 220-230 (CE) | 458-500 | 2.1-2.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 500-544 | 2.2-2.3 | BS-1363 | |
| GRS-72-C* | 72" x 5.25" (1829 x 133 mm) | 120 | 550 | 4.6 | NEMA 5-15P | 28 lbs (13 kg) |
| | | 220 | 504 | 2.3 | CEE 7/7 Schuko | |
| | | 240 | 598 | 2.5 | BS-1363 | |
| | | 220-230 (CE) | 504-550 | 2.3-2.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 550-598 | 2.4-2.5 | BS-1363 | |

| 12" (305 mm) DEPTH (D) | | | | | | |
|------------------------|-----------------------------|-----------------------|---------|---------|----------------|----------------|
| Model | Dimensions (W x H) | Voltages Single phase | Watts | Amps | Plug | Ship Weight† |
| GRS-18-D | 18" x 2.25" (457 x 57 mm) | 120 | 200 | 1.7 | NEMA 5-15P | 12 lbs (6 kg) |
| | | 220 | 181 | 0.8 | CEE 7/7 Schuko | |
| | | 240 | 218 | 0.9 | BS-1363 | |
| | | 220-230 (CE) | 182-200 | 0.8-0.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 200-218 | 0.9 | BS-1363 | |
| GRS-24-D | 24" x 2.25" (610 x 57 mm) | 120 | 250 | 2.1 | NEMA 5-15P | 15 lbs (7 kg) |
| | | 220 | 228 | 1.0 | CEE 7/7 Schuko | |
| | | 240 | 272 | 1.1 | BS-1363 | |
| | | 220-230 (CE) | 228-250 | 1.0-1.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 250-272 | 1.1 | BS-1363 | |
| GRS-30-D | 30" x 2.25" (762 x 57 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 17 lbs (8 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 326 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 246-300 | 1.1-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-326 | 1.3-1.4 | BS-1363 | |
| GRS-36-D | 36" x 2.25" (914 x 57 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 20 lbs (9 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 380 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-380 | 1.5-1.6 | BS-1363 | |
| GRS-42-D* | 42" x 5.25" (1067 x 133 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 23 lbs (11 kg) |
| | | 220 | 410 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 410-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 450-490 | 2.0-2.1 | BS-1363 | |
| GRS-48-D* | 48" x 5.25" (1219 x 133 mm) | 120 | 500 | 4.2 | NEMA 5-15P | 26 lbs (12 kg) |
| | | 220 | 456 | 2.1 | CEE 7/7 Schuko | |
| | | 240 | 544 | 2.3 | BS-1363 | |
| | | 220-230 (CE) | 456-500 | 2.1-2.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 500-544 | 2.2-2.3 | BS-1363 | |
| GRS-54-D* | 54" x 5.25" (1372 x 133 mm) | 120 | 550 | 4.6 | NEMA 5-15P | 30 lbs (14 kg) |
| | | 220 | 502 | 2.3 | CEE 7/7 Schuko | |
| | | 240 | 598 | 2.5 | BS-1363 | |
| | | 220-230 (CE) | 502-550 | 2.3-2.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 550-598 | 2.4-2.5 | BS-1363 | |
| GRS-60-D* | 60" x 5.25" (1524 x 133 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 34 lbs (16 kg) |
| | | 220 | 548 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 652 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 548-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 600-652 | 2.6-2.7 | BS-1363 | |
| GRS-66-D* | 66" x 5.25" (1676 x 133 mm) | 120 | 650 | 5.4 | NEMA 5-15P | 36 lbs (17 kg) |
| | | 220 | 594 | 2.7 | CEE 7/7 Schuko | |
| | | 240 | 706 | 2.9 | BS-1363 | |
| | | 220-230 (CE) | 594-650 | 2.7-2.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 650-706 | 2.8-2.9 | BS-1363 | |
| GRS-72-D* | 72" x 5.25" (1829 x 133 mm) | 120 | 700 | 5.8 | NEMA 5-15P | 37 lbs (17 kg) |
| | | 220 | 640 | 3.0 | CEE 7/7 Schuko | |
| | | 240 | 760 | 3.2 | BS-1363 | |
| | | 220-230 (CE) | 640-700 | 2.9-3.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 700-760 | 3.1-3.2 | BS-1363 | |

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipmentsales@hatcocorp.com | intl@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for international models

| 13.75" (349 mm) DEPTH (E) | | | | | | |
|---------------------------|--------------------------------|-----------------------|---------|---------|----------------|-------------------|
| Model | Dimensions (W x H) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight† |
| GRS-18-E | 18" x 2.25" (457 x 57 mm) | 120 | 200 | 1.7 | NEMA 5-15P | 13 lbs (6 kg) |
| | | 220 | 181 | 0.8 | CEE 7/7 Schuko | |
| | | 240 | 218 | 0.9 | BS-1363 | |
| | | 220-230 (CE) | 182-200 | 0.8-0.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 200-218 | 0.9 | BS-1363 | |
| GRS-24-E | 24" x 2.25" (610 x 57 mm) | 120 | 250 | 2.1 | NEMA 5-15P | 14 lbs (7 kg) |
| | | 220 | 228 | 1.0 | CEE 7/7 Schuko | |
| | | 240 | 272 | 1.1 | BS-1363 | |
| | | 220-230 (CE) | 228-250 | 1.0-1.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 250-272 | 1.1 | BS-1363 | |
| GRS-30-E | 30" x 2.25" (762 x 57 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 18 lbs (9 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 326 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 246-300 | 1.1-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-326 | 1.3-1.4 | BS-1363 | |
| GRS-36-E | 36" x 2.25" (914 x 57 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 22 lbs (10 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 380 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-380 | 1.5-1.6 | BS-1363 | |
| GRS-42-E* | 42" x 5.25" (1067 x 133 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 26 lbs (12 kg) |
| | | 220 | 410 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 410-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 450-490 | 2.0-2.1 | BS-1363 | |
| GRS-48-E* | 48" x 5.25" (1219 x 133 mm) | 120 | 500 | 4.2 | NEMA 5-15P | 29 lbs (14 kg) |
| | | 220 | 456 | 2.1 | CEE 7/7 Schuko | |
| | | 240 | 544 | 2.3 | BS-1363 | |
| | | 220-230 (CE) | 456-500 | 2.1-2.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 500-544 | 2.2-2.3 | BS-1363 | |
| GRS-54-E* | 54" x 5.25" (1372 x 133 mm) | 120 | 550 | 4.6 | NEMA 5-15P | 33 lbs (15 kg) |
| | | 220 | 502 | 2.3 | CEE 7/7 Schuko | |
| | | 240 | 598 | 2.5 | BS-1363 | |
| | | 220-230 (CE) | 502-550 | 2.3-2.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 550-598 | 2.4-2.5 | BS-1363 | |
| GRS-60-E* | 60" x 5.25" (1524 x 133 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 36 lbs (17 kg) |
| | | 220 | 548 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 652 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 548-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 600-652 | 2.6-2.7 | BS-1363 | |
| GRS-66-E* | 66" x 5.25" (1676 x 133 mm) | 120 | 650 | 5.4 | NEMA 5-15P | 38 lbs (18 kg) |
| | | 220 | 594 | 2.7 | CEE 7/7 Schuko | |
| | | 240 | 706 | 2.9 | BS-1363 | |
| | | 220-230 (CE) | 594-650 | 2.7-2.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 650-706 | 2.8-2.9 | BS-1363 | |
| GRS-72-E* | 72" x 5.25" (1829 x 133 mm) | 120 | 700 | 5.8 | NEMA 5-15P | 40 lbs (19 kg) |
| | | 220 | 640 | 3.0 | CEE 7/7 Schuko | |
| | | 240 | 760 | 3.2 | BS-1363 | |
| | | 220-230 (CE) | 640-700 | 2.9-3.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 700-760 | 3.1-3.2 | BS-1363 | |

| 15.5" (394 mm) DEPTH (F) | | | | | | |
|--------------------------|--------------------------------|-----------------------|---------|---------|----------------|-------------------|
| Model | Dimensions (W x H) | Voltages Single phase | Watts | Amps | Plug | Ship Weight† |
| GRS-18-F | 18" x 2.25" (457 x 57 mm) | 120 | 200 | 1.7 | NEMA 5-15P | 16 lbs (7 kg) |
| | | 220 | 181 | 0.8 | CEE 7/7 Schuko | |
| | | 240 | 218 | 0.9 | BS-1363 | |
| | | 220-230 (CE) | 182-200 | 0.8-0.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 200-218 | 0.9 | BS-1363 | |
| GRS-24-F | 24" x 2.25" (610 x 57 mm) | 120 | 250 | 2.1 | NEMA 5-15P | 17 lbs (8 kg) |
| | | 220 | 228 | 1.0 | CEE 7/7 Schuko | |
| | | 240 | 272 | 1.1 | BS-1363 | |
| | | 220-230 (CE) | 228-250 | 1.0-1.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 250-272 | 1.1 | BS-1363 | |
| GRS-30-F | 30" x 2.25" (762 x 57 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 22 lbs (10 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 326 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 246-300 | 1.1-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-326 | 1.3-1.4 | BS-1363 | |
| GRS-36-F | 36" x 2.25" (914 x 57 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 25 lbs (12 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 380 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-380 | 1.5-1.6 | BS-1363 | |
| GRS-42-F* | 42" x 5.25" (1067 x 133 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 26 lbs (12 kg) |
| | | 220 | 410 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 410-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 450-490 | 2.0-2.1 | BS-1363 | |
| GRS-48-F* | 48" x 5.25" (1219 x 133 mm) | 120 | 500 | 4.2 | NEMA 5-15P | 32 lbs (15 kg) |
| | | 220 | 456 | 2.1 | CEE 7/7 Schuko | |
| | | 240 | 544 | 2.3 | BS-1363 | |
| | | 220-230 (CE) | 456-500 | 2.1-2.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 500-544 | 2.2-2.3 | BS-1363 | |
| GRS-54-F* | 54" x 5.25" (1372 x 133 mm) | 120 | 550 | 4.6 | NEMA 5-15P | 38 lbs (18 kg) |
| | | 220 | 502 | 2.3 | CEE 7/7 Schuko | |
| | | 240 | 598 | 2.5 | BS-1363 | |
| | | 220-230 (CE) | 502-550 | 2.3-2.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 550-598 | 2.4-2.5 | BS-1363 | |
| GRS-60-F* | 60" x 5.25" (1524 x 133 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 39 lbs (18 kg) |
| | | 220 | 548 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 652 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 548-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 600-652 | 2.6-2.7 | BS-1363 | |
| GRS-66-F* | 66" x 5.25" (1676 x 133 mm) | 120 | 650 | 5.4 | NEMA 5-15P | 42 lbs (19 kg) |
| | | 220 | 594 | 2.7 | CEE 7/7 Schuko | |
| | | 240 | 706 | 2.9 | BS-1363 | |
| | | 220-230 (CE) | 594-650 | 2.7-2.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 650-706 | 2.8-2.9 | BS-1363 | |
| GRS-72-F* | 72" x 5.25" (1829 x 133 mm) | 120 | 700 | 5.8 | NEMA 5-15P | 46 lbs (21 kg) |
| | | 220 | 640 | 3.0 | CEE 7/7 Schuko | |
| | | 240 | 760 | 3.2 | BS-1363 | |
| | | 220-230 (CE) | 640-700 | 2.9-3.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 700-760 | 3.1-3.2 | BS-1363 | |

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipmentsales@hatcocorp.com | intl@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for international models

| 15.75" (400 mm) DEPTH (G) | | | | | | |
|---------------------------|-----------------------------|-----------------------|---------|---------|----------------|----------------|
| Model | Dimensions (W x H) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight† |
| GRS-18-G | 18" x 2.25" (457 x 57 mm) | 120 | 225 | 1.9 | NEMA 5-15P | 16 lbs (7 kg) |
| | | 220 | 205 | 0.9 | CEE 7/7 Schuko | |
| | | 240 | 245 | 1.0 | BS-1363 | |
| | | 220-230 (CE) | 205-225 | 0.9-1.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 225-245 | 1.0 | BS-1363 | |
| GRS-24-G | 24" x 2.25" (610 x 57 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 18 lbs (9 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 326 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-326 | 1.3-1.4 | BS-1363 | |
| GRS-30-G | 30" x 2.25" (762 x 57 mm) | 120 | 375 | 3.1 | NEMA 5-15P | 21 lbs (10 kg) |
| | | 220 | 343 | 1.6 | CEE 7/7 Schuko | |
| | | 240 | 408 | 1.7 | BS-1363 | |
| | | 220-230 (CE) | 343-375 | 1.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 375-408 | 1.6-1.7 | BS-1363 | |
| GRS-36-G | 36" x 2.25" (914 x 57 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 27 lbs (13 kg) |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 489 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 450-489 | 2.0 | BS-1363 | |
| GRS-42-G♦ | 42" x 5.25" (1067 x 133 mm) | 120 | 525 | 4.4 | NEMA 5-15P | 29 lbs (14 kg) |
| | | 220 | 479 | 2.2 | CEE 7/7 Schuko | |
| | | 240 | 571 | 2.4 | BS-1363 | |
| | | 220-230 (CE) | 479-525 | 2.2-2.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 525-571 | 2.3-2.4 | BS-1363 | |
| GRS-48-G♦ | 48" x 5.25" (1219 x 133 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 33 lbs (15 kg) |
| | | 220 | 548 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 652 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 548-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 600-652 | 2.6-2.7 | BS-1363 | |
| GRS-54-G♦ | 54" x 5.25" (1372 x 133 mm) | 120 | 675 | 5.6 | NEMA 5-15P | 38 lbs (18 kg) |
| | | 220 | 617 | 2.8 | CEE 7/7 Schuko | |
| | | 240 | 734 | 3.1 | BS-1363 | |
| | | 220-230 (CE) | 617-675 | 2.8-2.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 675-734 | 2.9-3.1 | BS-1363 | |
| GRS-60-G♦ | 60" x 5.25" (1524 x 133 mm) | 120 | 750 | 6.3 | NEMA 5-15P | 42 lbs (19 kg) |
| | | 220 | 686 | 3.1 | CEE 7/7 Schuko | |
| | | 240 | 816 | 3.4 | BS-1363 | |
| | | 220-230 (CE) | 686-750 | 3.1-3.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 750-816 | 3.3-3.4 | BS-1363 | |
| GRS-66-G♦ | 66" x 5.25" (1676 x 133 mm) | 120 | 825 | 6.9 | NEMA 5-15P | 45 lbs (21 kg) |
| | | 220 | 755 | 3.4 | CEE 7/7 Schuko | |
| | | 240 | 897 | 3.7 | BS-1363 | |
| | | 220-230 (CE) | 755-825 | 3.4-3.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 825-897 | 3.6-3.7 | BS-1363 | |
| GRS-72-G♦ | 72" x 5.25" (1829 x 133 mm) | 120 | 900 | 7.5 | NEMA 5-15P | 46 lbs (21 kg) |
| | | 220 | 824 | 3.7 | CEE 7/7 Schuko | |
| | | 240 | 978 | 4.1 | BS-1363 | |
| | | 220-230 (CE) | 824-900 | 3.7-3.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 900-978 | 3.9-4.1 | BS-1363 | |

| 17.5" (445 mm) DEPTH (H) | | | | | | |
|--------------------------|-----------------------------|-----------------------|---------|---------|----------------|----------------|
| Model | Dimensions (W x H) | Voltages Single phase | Watts | Amps | Plug | Ship Weight† |
| GRS-18-H | 18" x 2.25" (457 x 57 mm) | 120 | 225 | 1.9 | NEMA 5-15P | 16 lbs (8 kg) |
| | | 220 | 205 | 0.9 | CEE 7/7 Schuko | |
| | | 240 | 245 | 1.0 | BS-1363 | |
| | | 220-230 (CE) | 205-225 | 0.9-1.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 225-245 | 1.0 | BS-1363 | |
| GRS-24-H | 24" x 2.25" (610 x 57 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 18 lbs (9 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 326 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-326 | 1.3-1.4 | BS-1363 | |
| GRS-30-H | 30" x 2.25" (762 x 57 mm) | 120 | 375 | 3.1 | NEMA 5-15P | 21 lbs (10 kg) |
| | | 220 | 343 | 1.6 | CEE 7/7 Schuko | |
| | | 240 | 408 | 1.7 | BS-1363 | |
| | | 220-230 (CE) | 343-375 | 1.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 375-408 | 1.6-1.7 | BS-1363 | |
| GRS-36-H | 36" x 2.25" (914 x 57 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 27 lbs (13 kg) |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 489 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 450-489 | 2.0 | BS-1363 | |
| GRS-42-H♦ | 42" x 5.25" (1067 x 133 mm) | 120 | 525 | 4.4 | NEMA 5-15P | 32 lbs (15 kg) |
| | | 220 | 479 | 2.2 | CEE 7/7 Schuko | |
| | | 240 | 571 | 2.4 | BS-1363 | |
| | | 220-230 (CE) | 479-525 | 2.2-2.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 525-571 | 2.3-2.4 | BS-1363 | |
| GRS-48-H♦ | 48" x 5.25" (1219 x 133 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 35 lbs (16 kg) |
| | | 220 | 548 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 652 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 548-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 600-652 | 2.6-2.7 | BS-1363 | |
| GRS-54-H♦ | 54" x 5.25" (1372 x 133 mm) | 120 | 675 | 5.6 | NEMA 5-15P | 40 lbs (19 kg) |
| | | 220 | 617 | 2.8 | CEE 7/7 Schuko | |
| | | 240 | 734 | 3.1 | BS-1363 | |
| | | 220-230 (CE) | 617-675 | 2.8-2.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 675-734 | 2.9-3.1 | BS-1363 | |
| GRS-60-H♦ | 60" x 5.25" (1524 x 133 mm) | 120 | 750 | 6.3 | NEMA 5-15P | 44 lbs (20 kg) |
| | | 220 | 686 | 3.1 | CEE 7/7 Schuko | |
| | | 240 | 816 | 3.4 | BS-1363 | |
| | | 220-230 (CE) | 686-750 | 3.1-3.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 750-816 | 3.3-3.4 | BS-1363 | |
| GRS-66-H♦ | 66" x 5.25" (1676 x 133 mm) | 120 | 825 | 6.9 | NEMA 5-15P | 49 lbs (23 kg) |
| | | 220 | 755 | 3.4 | CEE 7/7 Schuko | |
| | | 240 | 897 | 3.7 | BS-1363 | |
| | | 220-230 (CE) | 755-825 | 3.4-3.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 825-897 | 3.6-3.7 | BS-1363 | |
| GRS-72-H♦ | 72" x 5.25" (1829 x 133 mm) | 120 | 900 | 7.5 | NEMA 5-15P | 50 lbs (23 kg) |
| | | 220 | 824 | 3.7 | CEE 7/7 Schuko | |
| | | 240 | 978 | 4.1 | BS-1363 | |
| | | 220-230 (CE) | 824-900 | 3.7-3.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 900-978 | 3.9-4.1 | BS-1363 | |

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (102 mm) legs.

♦ NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipmentsales@hatcocorp.com | intl@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

| 21.5" (546 mm) DEPTH (J) | | | | | | |
|--------------------------|-----------------------------|-----------------------|-----------|---------|----------------|----------------|
| Model | Dimensions (W x H) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight† |
| GRS-18-J | 18" x 2.25" (457 x 57 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 20 lbs (9 kg) |
| | | 220 | 273 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 327 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 273-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-327 | 1.3-1.4 | BS-1363 | |
| GRS-24-J | 24" x 2.25" (610 x 57 mm) | 120 | 375 | 3.1 | NEMA 5-15P | 24 lbs (11 kg) |
| | | 220 | 342 | 1.6 | CEE 7/7 Schuko | |
| | | 240 | 408 | 1.7 | BS-1363 | |
| | | 220-230 (CE) | 342-375 | 1.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 375-408 | 1.6-1.7 | BS-1363 | |
| GRS-30-J | 30" x 2.25" (762 x 57 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 30 lbs (14 kg) |
| | | 220 | 411 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 489 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 411-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 450-489 | 2.0 | BS-1363 | |
| GRS-36-J | 36" x 2.25" (914 x 57 mm) | 120 | 525 | 4.4 | NEMA 5-15P | 33 lbs (15 kg) |
| | | 220 | 480 | 2.2 | CEE 7/7 Schuko | |
| | | 240 | 570 | 2.4 | BS-1363 | |
| | | 220-230 (CE) | 480-525 | 2.2-2.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 525-570 | 2.3-2.4 | BS-1363 | |
| GRS-42-J* | 42" x 5.25" (1067 x 133 mm) | 120 | 675 | 5.6 | NEMA 5-15P | 39 lbs (18 kg) |
| | | 220 | 615 | 2.8 | CEE 7/7 Schuko | |
| | | 240 | 735 | 3.1 | BS-1363 | |
| | | 220-230 (CE) | 615-675 | 2.8-2.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 675-735 | 2.9-3.1 | BS-1363 | |
| GRS-48-J* | 48" x 5.25" (1219 x 133 mm) | 120 | 750 | 6.3 | NEMA 5-15P | 45 lbs (21 kg) |
| | | 220 | 684 | 3.1 | CEE 7/7 Schuko | |
| | | 240 | 816 | 3.4 | BS-1363 | |
| | | 220-230 (CE) | 684-750 | 3.1-3.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 750-816 | 3.3-3.4 | BS-1363 | |
| GRS-54-J* | 54" x 5.25" (1372 x 133 mm) | 120 | 825 | 6.9 | NEMA 5-15P | 49 lbs (23 kg) |
| | | 220 | 753 | 3.4 | CEE 7/7 Schuko | |
| | | 240 | 897 | 3.7 | BS-1363 | |
| | | 220-230 (CE) | 753-825 | 3.4-3.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 825-897 | 3.6-3.7 | BS-1363 | |
| GRS-60-J* | 60" x 5.25" (1524 x 133 mm) | 120 | 900 | 7.5 | NEMA 5-15P | 53 lbs (24 kg) |
| | | 220 | 822 | 3.7 | CEE 7/7 Schuko | |
| | | 240 | 978 | 4.1 | BS-1363 | |
| | | 220-230 (CE) | 822-900 | 3.7-3.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 900-978 | 4.1 | BS-1363 | |
| GRS-66-J* | 66" x 5.25" (1676 x 133 mm) | 120 | 975 | 8.1 | NEMA 5-15P | 60 lbs (28 kg) |
| | | 220 | 891 | 4.1 | CEE 7/7 Schuko | |
| | | 240 | 1059 | 4.4 | BS-1363 | |
| | | 220-230 (CE) | 891-975 | 4.1-4.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 975-1059 | 4.2-4.4 | BS-1363 | |
| GRS-72-J* | 72" x 5.25" (1829 x 133 mm) | 120 | 1050 | 8.8 | NEMA 5-15P | 64 lbs (30 kg) |
| | | 220 | 960 | 4.4 | CEE 7/7 Schuko | |
| | | 240 | 1140 | 4.8 | BS-1363 | |
| | | 220-230 (CE) | 960-1050 | 4.4-4.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1050-1140 | 4.6-4.8 | BS-1363 | |

| 23.5" (597 mm) DEPTH (K) | | | | | | |
|--------------------------|-----------------------------|-----------------------|-----------|---------|----------------|----------------|
| Model | Dimensions (W x H) | Voltages Single phase | Watts | Amps | Plug | Ship Weight† |
| GRS-18-K | 18" x 2.25" (457 x 57 mm) | 120 | 325 | 2.7 | NEMA 5-15P | 23 lbs (11 kg) |
| | | 220 | 296 | 1.3 | CEE 7/7 Schuko | |
| | | 240 | 354 | 1.5 | BS-1363 | |
| | | 220-230 (CE) | 296-325 | 1.3-1.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 325-354 | 1.4-1.5 | BS-1363 | |
| GRS-24-K | 24" x 2.25" (610 x 57 mm) | 120 | 425 | 3.5 | NEMA 5-15P | 27 lbs (13 kg) |
| | | 220 | 388 | 1.8 | CEE 7/7 Schuko | |
| | | 240 | 462 | 1.9 | BS-1363 | |
| | | 220-230 (CE) | 388-425 | 1.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 425-462 | 1.8-1.9 | BS-1363 | |
| GRS-30-K | 30" x 2.25" (762 x 57 mm) | 120 | 525 | 4.4 | NEMA 5-15P | 33 lbs (15 kg) |
| | | 220 | 480 | 2.2 | CEE 7/7 Schuko | |
| | | 240 | 571 | 2.4 | BS-1363 | |
| | | 220-230 (CE) | 480-525 | 2.2-2.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 525-571 | 2.3-2.4 | BS-1363 | |
| GRS-36-K | 36" x 2.25" (914 x 57 mm) | 120 | 625 | 5.2 | NEMA 5-15P | 36 lbs (17 kg) |
| | | 220 | 572 | 2.6 | CEE 7/7 Schuko | |
| | | 240 | 679 | 2.8 | BS-1363 | |
| | | 220-230 (CE) | 572-625 | 2.6-2.7 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 625-679 | 2.7-2.8 | BS-1363 | |
| GRS-42-K* | 42" x 5.25" (1067 x 133 mm) | 120 | 750 | 6.3 | NEMA 5-15P | 43 lbs (20 kg) |
| | | 220 | 684 | 3.1 | CEE 7/7 Schuko | |
| | | 240 | 816 | 3.4 | BS-1363 | |
| | | 220-230 (CE) | 684-750 | 3.1-3.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 750-816 | 3.3-3.4 | BS-1363 | |
| GRS-48-K* | 48" x 5.25" (1219 x 133 mm) | 120 | 850 | 7.1 | NEMA 5-15P | 48 lbs (22 kg) |
| | | 220 | 776 | 3.5 | CEE 7/7 Schuko | |
| | | 240 | 924 | 3.9 | BS-1363 | |
| | | 220-230 (CE) | 776-850 | 3.5-3.7 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 850-924 | 3.7-3.9 | BS-1363 | |
| GRS-54-K* | 54" x 5.25" (1372 x 133 mm) | 120 | 950 | 7.9 | NEMA 5-15P | 52 lbs (24 kg) |
| | | 220 | 868 | 3.9 | CEE 7/7 Schuko | |
| | | 240 | 1033 | 4.3 | BS-1363 | |
| | | 220-230 (CE) | 868-950 | 3.9-4.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 950-1033 | 4.1-4.3 | BS-1363 | |
| GRS-60-K* | 60" x 5.25" (1524 x 133 mm) | 120 | 1050 | 8.8 | NEMA 5-15P | 56 lbs (26 kg) |
| | | 220 | 960 | 4.4 | CEE 7/7 Schuko | |
| | | 240 | 1142 | 4.8 | BS-1363 | |
| | | 220-230 (CE) | 960-1050 | 4.4-4.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1050-1142 | 4.6-4.8 | BS-1363 | |
| GRS-66-K* | 66" x 5.25" (1676 x 133 mm) | 120 | 1150 | 9.6 | NEMA 5-15P | 68 lbs (31 kg) |
| | | 220 | 1052 | 4.8 | CEE 7/7 Schuko | |
| | | 240 | 1250 | 5.2 | BS-1363 | |
| | | 220-230 (CE) | 1052-1150 | 4.8-5.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1150-1250 | 5.0-5.2 | BS-1363 | |
| GRS-72-K* | 72" x 5.25" (1829 x 133 mm) | 120 | 1250 | 10.4 | NEMA 5-15P | 69 lbs (32 kg) |
| | | 220 | 1144 | 5.2 | CEE 7/7 Schuko | |
| | | 240 | 1358 | 5.7 | BS-1363 | |
| | | 220-230 (CE) | 1144-1250 | 5.2-5.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1250-1358 | 5.4-5.7 | BS-1363 | |

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipmentsales@hatcocorp.com | intl@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models


25.5" (648 mm) DEPTH (L)

| Model | Dimensions (W x H) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight† |
|-----------|--------------------------------|-----------------------|-----------|---------|----------------|-------------------|
| GRS-18-L | 18" x 2.25" (457 x 57 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 22 lbs (10 kg) |
| | | 220 | 319 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 381 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 319-325 | 1.4-1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 325-381 | 1.5-1.6 | BS-1363 | |
| GRS-24-L | 24" x 2.25" (610 x 57 mm) | 120 | 475 | 4.0 | NEMA 5-15P | 26 lbs (12 kg) |
| | | 220 | 434 | 2.0 | CEE 7/7 Schuko | |
| | | 240 | 516 | 2.2 | BS-1363 | |
| | | 220-230 (CE) | 434-475 | 2.0-2.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 475-516 | 2.1-2.2 | BS-1363 | |
| GRS-30-L | 30" x 2.25" (762 x 57 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 33 lbs (15 kg) |
| | | 220 | 549 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 653 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 549-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 600-653 | 2.6-2.7 | BS-1363 | |
| GRS-36-L | 36" x 2.25" (914 x 57 mm) | 120 | 725 | 6.0 | NEMA 5-15P | 37 lbs (17 kg) |
| | | 220 | 664 | 3.0 | CEE 7/7 Schuko | |
| | | 240 | 788 | 3.3 | BS-1363 | |
| | | 220-230 (CE) | 664-725 | 3.0-3.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 725-788 | 3.2-3.3 | BS-1363 | |
| GRS-42-L* | 42" x 5.25" (1067 x 133 mm) | 120 | 825 | 6.9 | NEMA 5-15P | 43 lbs (20 kg) |
| | | 220 | 753 | 3.4 | CEE 7/7 Schuko | |
| | | 240 | 897 | 3.7 | BS-1363 | |
| | | 220-230 (CE) | 753-825 | 3.4-3.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 825-897 | 3.6-3.7 | BS-1363 | |
| GRS-48-L* | 48" x 5.25" (1219 x 133 mm) | 120 | 950 | 7.9 | NEMA 5-15P | 50 lbs (23 kg) |
| | | 220 | 868 | 3.9 | CEE 7/7 Schuko | |
| | | 240 | 1032 | 4.3 | BS-1363 | |
| | | 220-230 (CE) | 868-950 | 3.9-4.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 950-1032 | 4.1-4.3 | BS-1363 | |
| GRS-54-L* | 54" x 5.25" (1372 x 133 mm) | 120 | 1075 | 9.0 | NEMA 5-15P | 58 lbs (27 kg) |
| | | 220 | 983 | 4.5 | CEE 7/7 Schuko | |
| | | 240 | 1169 | 4.9 | BS-1363 | |
| | | 220-230 (CE) | 983-1075 | 4.5-4.7 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1075-1169 | 4.7-4.9 | BS-1363 | |
| GRS-60-L* | 60" x 5.25" (1524 x 133 mm) | 120 | 1200 | 10.0 | NEMA 5-15P | 60 lbs (28 kg) |
| | | 220 | 1098 | 5.0 | CEE 7/7 Schuko | |
| | | 240 | 1306 | 5.4 | BS-1363 | |
| | | 220-230 (CE) | 1098-1200 | 5.0-5.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1200-1306 | 5.2-5.4 | BS-1363 | |
| GRS-66-L* | 66" x 5.25" (1676 x 133 mm) | 120 | 1325 | 11.0 | NEMA 5-15P | 65 lbs (30 kg) |
| | | 220 | 1213 | 5.5 | CEE 7/7 Schuko | |
| | | 240 | 1441 | 6.0 | BS-1363 | |
| | | 220-230 (CE) | 1213-1325 | 5.5-5.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1325-1441 | 5.8-6.0 | BS-1363 | |
| GRS-72-L* | 72" x 5.25" (1829 x 133 mm) | 120 | 1450 | 12.0 | NEMA 5-15P | 69 lbs (32 kg) |
| | | 220 | 1328 | 6.0 | CEE 7/7 Schuko | |
| | | 240 | 1576 | 6.6 | BS-1363 | |
| | | 220-230 (CE) | 1328-1450 | 6.0-6.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1450-1576 | 6.3-6.6 | BS-1363 | |

CORD LOCATION

Center of side with controls.

PLUG CONFIGURATIONS

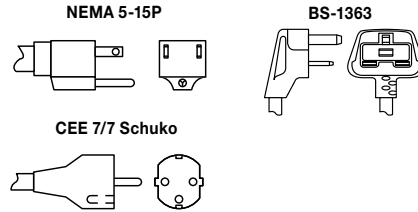

- * Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.
- † NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.
- † Shipping weight includes packaging.

PRODUCT SPECS Heated Shelves

The Heated Shelf shall be a Glo-Ray®... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A. The Shelf shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall width. It shall consist of a thermostatically-controlled heated base and a cord with plug attached.

Accessories shall include 4" (102 mm) adjustable legs, slant leg kit and pan rail. Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com