

## Refrigeration Equipment Reach-In Freezer, 1 Door, 25 cu.ft - Stainless Steel (R290)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738279 (KCHRI25R1DFE)

1-door reach-in freezer,  
stainless steel, 25 cubic feet,  
R290 refrigerant gas, -8/+5°F

### Short Form Specification

**Item No.** \_\_\_\_\_

1 full door freezer with door and bottom panel in 430 stainless steel, exterior back, side and top panels in prepainted steel; interior back, side, top and bottom panels in white High Impact Polystyrene.

Control with cabinet temperature display. Self-closing and on-site reversible door feature with lock and key. Temperature range: - 8 °F min / 5 °F max.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

### Main Features


- External temperature display.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.

### Construction


- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.
- PVC shelves.

APPROVAL: \_\_\_\_\_

**Front**

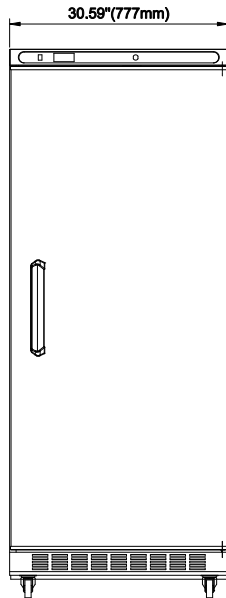


**Side**

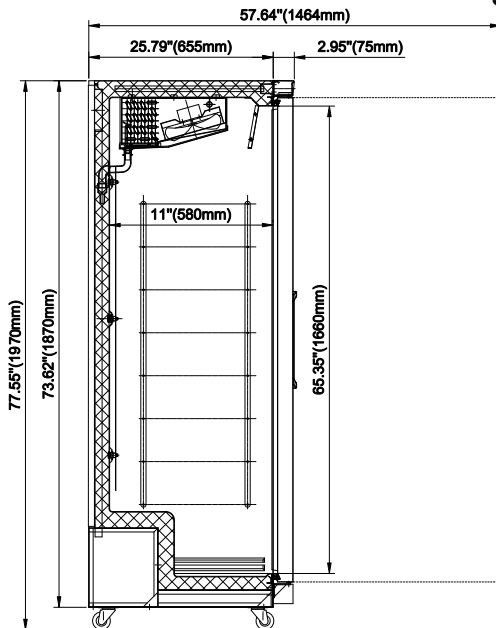

EI = Electrical connection

**Top**



## Electric

**Supply voltage:**

738279 (KCHRI25R1DFE) 115 V/1 ph/60 Hz

**Current consumption:**

7 Amps

**Plug type:**

USA NEMA 5-15P

## Key Information:

<b>Door hinges:</b>	Right Side
<b>Capacity (Cu. Ft.)</b>	25
<b>External dimensions, Width:</b>	30 9/16" (776.99 mm)
<b>External dimensions, Depth:</b>	28 3/4" (730 mm)
<b>External dimensions, Height:</b>	77 9/16" (1970 mm)
<b>Number and type of doors:</b>	1 ; Full
<b>Number and type of grids (included):</b>	3 - Vinyl-Coated steel
<b>Type of external material:</b>	Prepainted Steel
<b>Type of internal material:</b>	White Polystyrene
<b>External Door material:</b>	430 AISI
<b>Warranty:</b>	3 / 5 years
<b>External door material:</b>	Stainless Steel

## Refrigeration Data

<b>Compressor Horsepower:</b>	1/6
<b>Refrigerant type:</b>	;R290
<b>Operating temperature min.:</b>	-7.6 °F
<b>Operating temperature max.:</b>	5 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	auto defrost