

**nemco**<sup>®</sup> | FOOD  
EQUIPMENT

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

Model Nos. 8010, 8010V, 8018, 8027, 8036,  
8045N, 8045W, 8075,  
*GripsIt* 8010SX, 8010VSX, 8018SX, 8027SX,  
8036SX, 8045SXN, 8045SXW, 8075SX

## Hot Dog Roller Grills

When it comes to making money, you can't go wrong with an original. Operators will tell you Nemco—the original hot dog roller grill—has always been famous for its superior diehard cooking performance. Its time-tested, maintenance-free design will serve you for years and forever satisfy your customers with the tastiest, juiciest hot dogs. 360° roller rotation prevents residue buildup, while individual roller heating elements ensure heating consistency. Removable drip pan makes for easy cleaning. Requires no ventilation system. Seven heat settings offer versatile temperature control. Front and rear rollers have their own heat controls. This feature permits shutting off one section during non peak hours. *GripsIt*—this coating makes clean up easy for those sugary-coated products and breakfast items.

### Standard Features:

- Rugged stainless steel and aluminum construction
- Simplest installation— plugs into any outlet with corresponding voltage
- Rollers available in either standard chrome, or *GripsIt* which cleans easily with just a damp sponge
- Two individual heat controls for front and rear rollers except 8010 series
- Temperature control with seven heat settings
- Individual heating element in each roller with superior temperature consistency from end to end
- Sealed motor with ball bearings to prevent grease leakage out of motor
- Rollers rotate at a complete 360° turn by means of a roller sprocket, motor sprocket and chain
- End bearing and grease barrier double protect against grease seepage
- Removable grease drip pan
- Preheat time is 10 minutes
- Full one year factory warranty
- NSF and cETLus certified

### Accessories:

- Food Safety Guards available for all roller grills; offers sanitary protection
- Heated and humidified Bun Warmers keep buns fresh and ready to serve
- Bun boxes come in a variety of sizes for great merchandising
- Stainless steel Condiment Bars and Stations provide a neat and efficient way to provide condiments





8027



NEMCO Food Equipment, Ltd.  
301 Meuse Argonne  
P.O. Box 305  
Hicksville, OH 43526  
Phone (419) 542-7751  
FAX (419) 542-6690  
www.nemcofoodequip.com

|                   |        |         |        |        |        |         |         |        |  |
|-------------------|--------|---------|--------|--------|--------|---------|---------|--------|--|
| <b>Model Nos.</b> |        |         |        |        |        |         |         |        |  |
| <b>Chrome</b>     | 8010   | 8010V   | 8018   | 8027   | 8036   | 8045N   | 8045W   | 8075   |  |
| <b>GripsIt</b>    | 8010SX | 8010VSX | 8018SX | 8027SX | 8036SX | 8045SXN | 8045SXW | 8075SX |  |

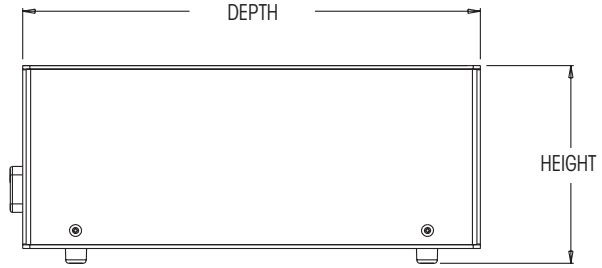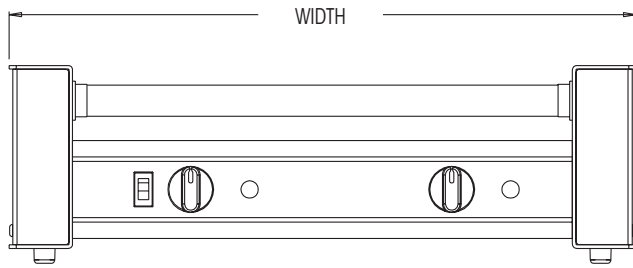

**Specifications:**

| Model No.  | Hot Dog Capacity | Width Inches/(cm) | Depth Inches/(cm) | Height Inches/(cm) | Voltage           | Wattage              | Nominal Amps         | # of Cords/ NEMA Configuration               | Unit Weight lbs./(kg) | Shipping Weight lbs./(kg) |
|--|------------------|-------------------|-------------------|--------------------|-------------------|----------------------|----------------------|--|-----------------------|---------------------------|
| 8010, 8010SX<br>8010-220, 8010SX-220<br>8010-230, 8010SX-230       | 10               | 16 (40.6)         | 11 (27.9)         | 7 1/4 (18.4)       | 120<br>220<br>230 | 330<br>330<br>330    | 2.8<br>1.5<br>1.4    | (1) 5-15 plug<br>(1) 6-15 plug<br>(1) SCHUKO | 18 (8.2)              | 20 (9.1)                  |
| 8018, 8018SX<br>8018-220, 8018SX-220<br>8018-230, 8018SX-230       | 18               | 18 1/2 (47.0)     | 16 1/4 (41.3)     | 7 (17.8)           | 120<br>220<br>230 | 950<br>950<br>950    | 7.9<br>4.3<br>4.1    | (1) 5-15 plug<br>(1) 6-15 plug<br>(1) SCHUKO | 29 (13.2)             | 35 (16.0)                 |
| 8027, 8027SX<br>8027-220, 8027SX-220<br>8027-230, 8027SX-230       | 27               | 22 1/4 (56.5)     | 16 1/4 (41.3)     | 7 (17.8)           | 120<br>220<br>230 | 950<br>950<br>950    | 7.9<br>4.3<br>4.1    | (1) 5-15 plug<br>(1) 6-15 plug<br>(1) SCHUKO | 33 (15.0)             | 38 (17.3)                 |
| 8036, 8036SX<br>8036-220, 8036SX-220<br>8036-230, 8036SX-230       | 36               | 29 1/2 (74.9)     | 16 1/4 (41.3)     | 7 (17.8)           | 120<br>220<br>230 | 1500<br>1500<br>1500 | 12.5<br>6.8<br>6.5   | (1) 5-15 plug<br>(1) 6-15 plug<br>(1) SCHUKO | 44 (20.0)             | 50 (22.8)                 |
| 8045N, 8045SXN<br>8045N-220, 8045SXN-220<br>8045N-230, 8045SXN-230 | 45               | 22 1/4 (56.5)     | 25 3/4 (65.4)     | 7 (17.8)           | 120<br>220<br>230 | 1520<br>1520<br>1520 | 12.7<br>6.9<br>6.6   | (1) 5-15 plug<br>(1) 6-15 plug<br>(1) SCHUKO | 52 (23.7)             | 58 (26.4)                 |
| 8045W, 8045SXW<br>8045W-220, 8045SXW-220<br>8045W-230, 8045SXW-230 | 45               | 35 1/2 (90.2)     | 16 1/4 (41.3)     | 7 (17.8)           | 120<br>220<br>230 | 1800<br>1800<br>1800 | 15.0<br>8.2<br>7.9   | (1) 5-15 plug<br>(1) 6-15 plug<br>(1) SCHUKO | 51 (23.2)             | 57 (26.0)                 |
| 8075, 8075SX<br>8075-220, 8075SX-220<br>8075-230, 8075SX-230       | 75               | 35 1/2 (90.2)     | 25 3/4 (65.5)     | 7 (17.8)           | 120<br>220<br>230 | 2880<br>2880<br>2880 | 24.0<br>13.1<br>12.5 | (2) 5-15 plug<br>(2) 6-15 plug<br>(2) SCHUKO | 75 (34.1)             | 83 (37.8)                 |

(SX) Denotes special non slip *GripsIt* coating

**Typical Specifications**

Roller Grill shall be stainless steel and heavy-duty aluminum construction and use a special non slip *GripsIt*, or chrome rollers and tubular heating elements. One element shall be contained in each roller. Seven setting infinite temperature control provides flexible cooking and holding. Unit shall have a sealed motor with ball bearings for long life. Each roller shall have a PTFE end bearing and FEP grease barrier combination. The unit shall be equipped with a pilot light, lighted rocker switch and operate on 120V (60Hz) with (1) or (2) 6' cord (s) and NEMA 5-15P, 5/20P, on 220V (60Hz) with a 6' cord and NEMA 6-15P, or on 230V (50Hz) with a 6' cord and SCHUKO CEE7-7. Roller grills shall carry the approval of cETLus (120V, 220V), shall be listed with the National Sanitation Foundation (120V), and shall carry the approval of CE (230V).

AIA File No.



**nemco**® | FOOD EQUIPMENT

NEMCO Food Equipment, Ltd.  
301 Meuse Argonne  
PO Box 305  
Hicksville, OH 43526  
Phone (419) 542-7751  
Fax (419) 541-6690  
[www.nemcofoodequip.com](http://www.nemcofoodequip.com)

